


- Occupies one reader port on Keyscan Systems
- May be used on non-Keyscan systems with many HID 125kHz card protocols
- Suitable for outdoor use in all weather conditions
- Keypad labeled with alpha-numeric identifiers
- Pass-thru Wiegand output standard
- Pin entry outputs an 8-bit burst
- Epoxy encased electronics provide reliable operation
- Convenient mounting to a single gang wall box
- Buttons provide audible feedback
- Blue backlighting for easy use in low light areas
- Provides read range of up to 15.2cm (6 inches)
- Raised 'pip' on the 5 key for visually impaired individuals
- Limited lifetime warranty against defects in materials and workmanship



### FEATURES AND BENEFITS

- Ideal for applications that require enhanced security by enforcing both card presentation and PIN entry for secured areas
- For applications where cards are not issued, users may be assigned a temporary or permanent PIN with designated access privileges
- Mounts on a single gang electrical box
- Membrane style keypad surface prevents malfunction due to dust and debris accumulation
- Keypad surface does not leave finger print smudges

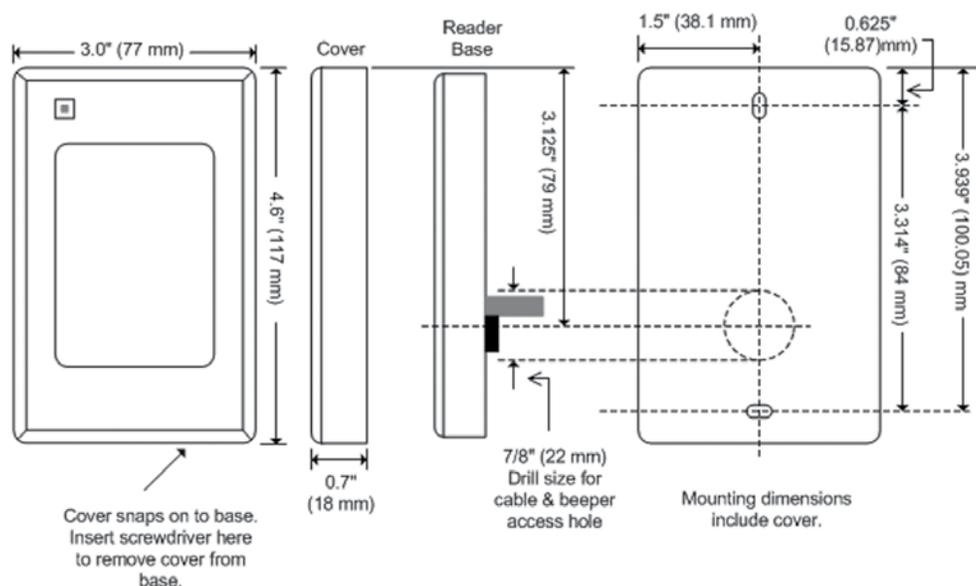

### SPECIFICATIONS

- Size: 4.6 x 3 x 0.7 inches (117 x 77 x 18mm)  
 Read Range: Off metal – up to 6" (15.2cm)  
                   On metal – up to 4" (10.2cm)  
 Input Voltage: 12VDC at Reader  
 Current Draw: 115mA  
 Operating Temperature: -40°C to 65°C (-40°F to 149°F)  
 Cable: 6 conductor shielded cable  
 Wiegand Output: 500 feet (152 meters)