

NOTE: THE STANDARD PACKAGE CONSISTS OF:
 THE AUTOMATIC OPERATOR, CONTROLLER, POWER SUPPLY, PULL ARM, PUSH ARM (INCLUDED IN BOX), SPINDLE COVERS, HOLD/AUTO/OFF SWITCH, SMART DEVICE OPERATION VIA APP (DEVICE BY OTHERS), DOOR STOP, ELECTRONIC & MECHANICAL LOCK KICK. SMART DEVICE DIAGNOSTICS & STATISTICS VIA APP (DEVICE BY OTHERS)
 STANDARD FINISH: CLEAR OR DARK BRONZE


- OPTIONS:**
- REMOTE POWER BOX ADAPTOR KIT, CONCEALED IN CEILING OR FLUSH MOUNTED IN WALL. CUT SHEET AA-61
 - SURFACE MOUNTED WIRE MOLD
 - DOOR MOUNTED APPROACH SIDE SAFETY SENSOR
 - WAVE OR PRESS ACTIVATION PLATES (PLATES CAN BE CONCEALED INTO WALL OR SURFACE MOUNTED WITH WATER RESISTANT PLASTIC ENCLOSURE)
 - ELECTRIC STRIKE TO RELEASE DOOR LATCH (IF EQUIPPED)
 - PLUG-IN POWER SUPPLY KIT, CUT SHEET AA-65

AUTOMATIC :-
 ACTIVATE THE DOOR BY HANDICAPPED WAVE/PRESS PLATE AND THE DOOR WILL SLOWLY POWER OPEN, TIME OUT, AND SLOWLY CLOSE.


PUSH ACTIVATION :- (OPTIONAL)
 PUSH OR PULL THE DOOR AND IT WILL SLOWLY POWER OPEN, TIME OUT, AND SLOWLY CLOSE.

NOTE : OPERATIONAL ADJUSTMENTS TO BE IN ACCORDANCE WITH ANSI/BHMA A156.19 STANDARD. FOR LOW ENERGY POWER OPERATED DOORS.


NOTE : WAVE/PRESS PLATE ACTIVATION TO BE LOCATED WITHIN VIEW OF THE DOOR. REFERENCE ANSI A156.19 FOR FURTHER DETAILS.

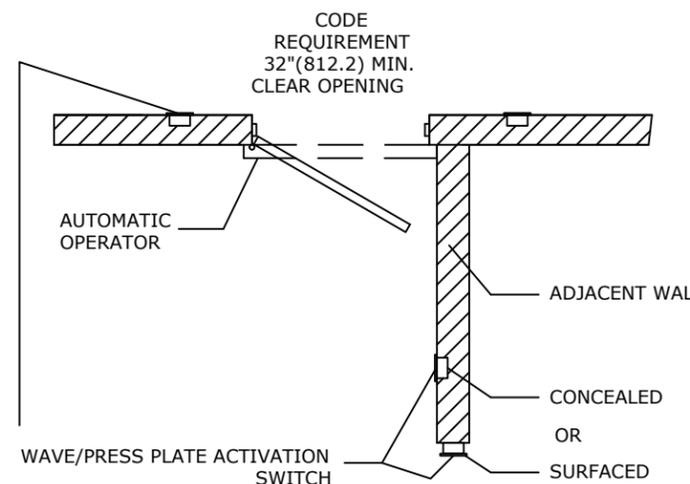

DWG NO.	D001570802-001				
DRN BY	SS	DATE	7/23/20	CHK BY	DATE
				REV. 4.0	DATE 11/18/24

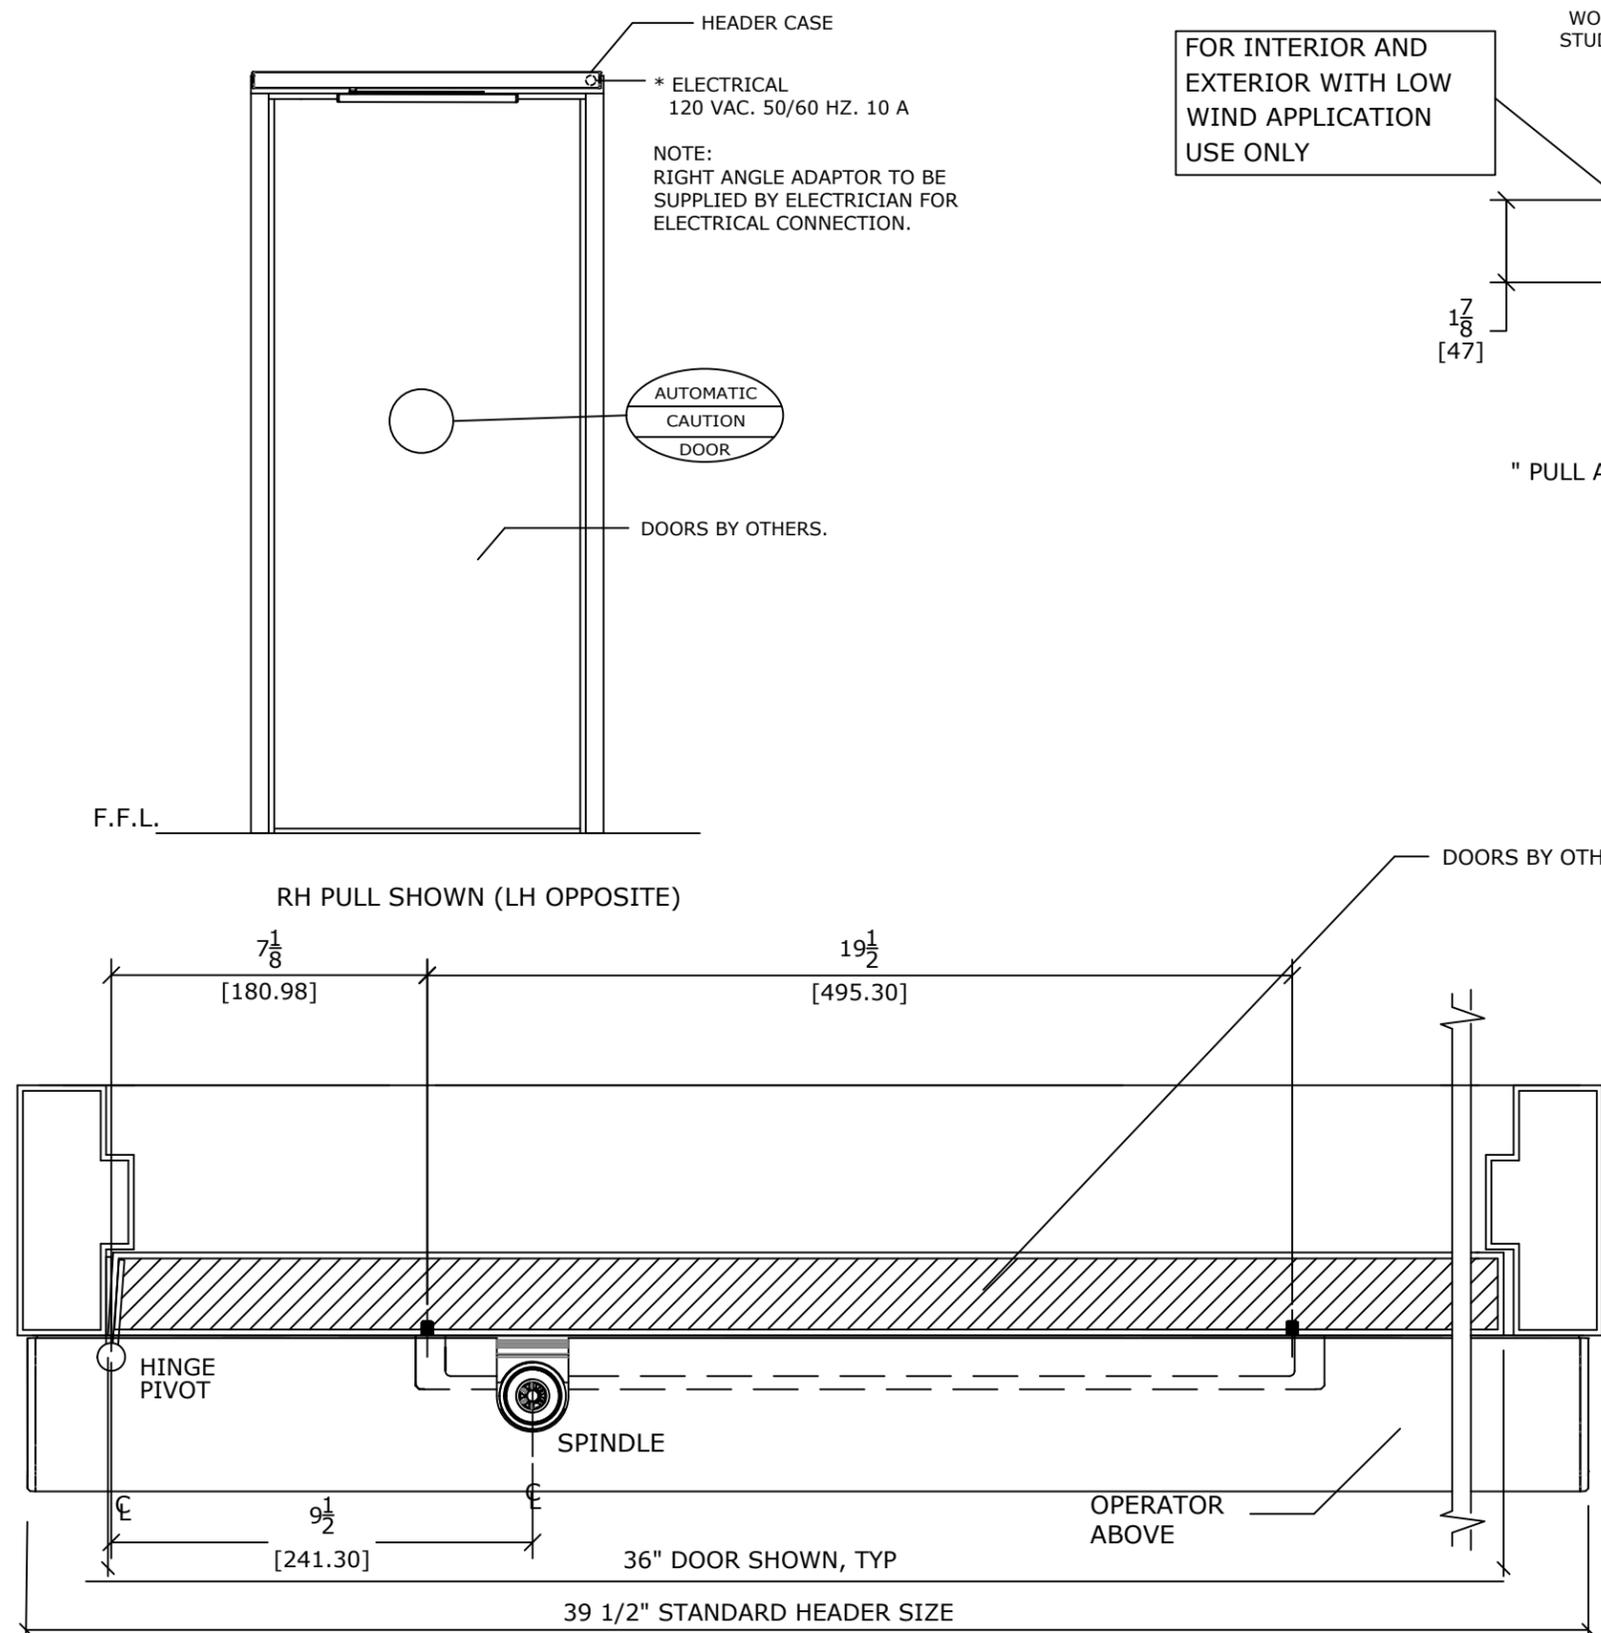

FOR INTERIOR AND EXTERIOR WITH LOW WIND APPLICATION USE ONLY

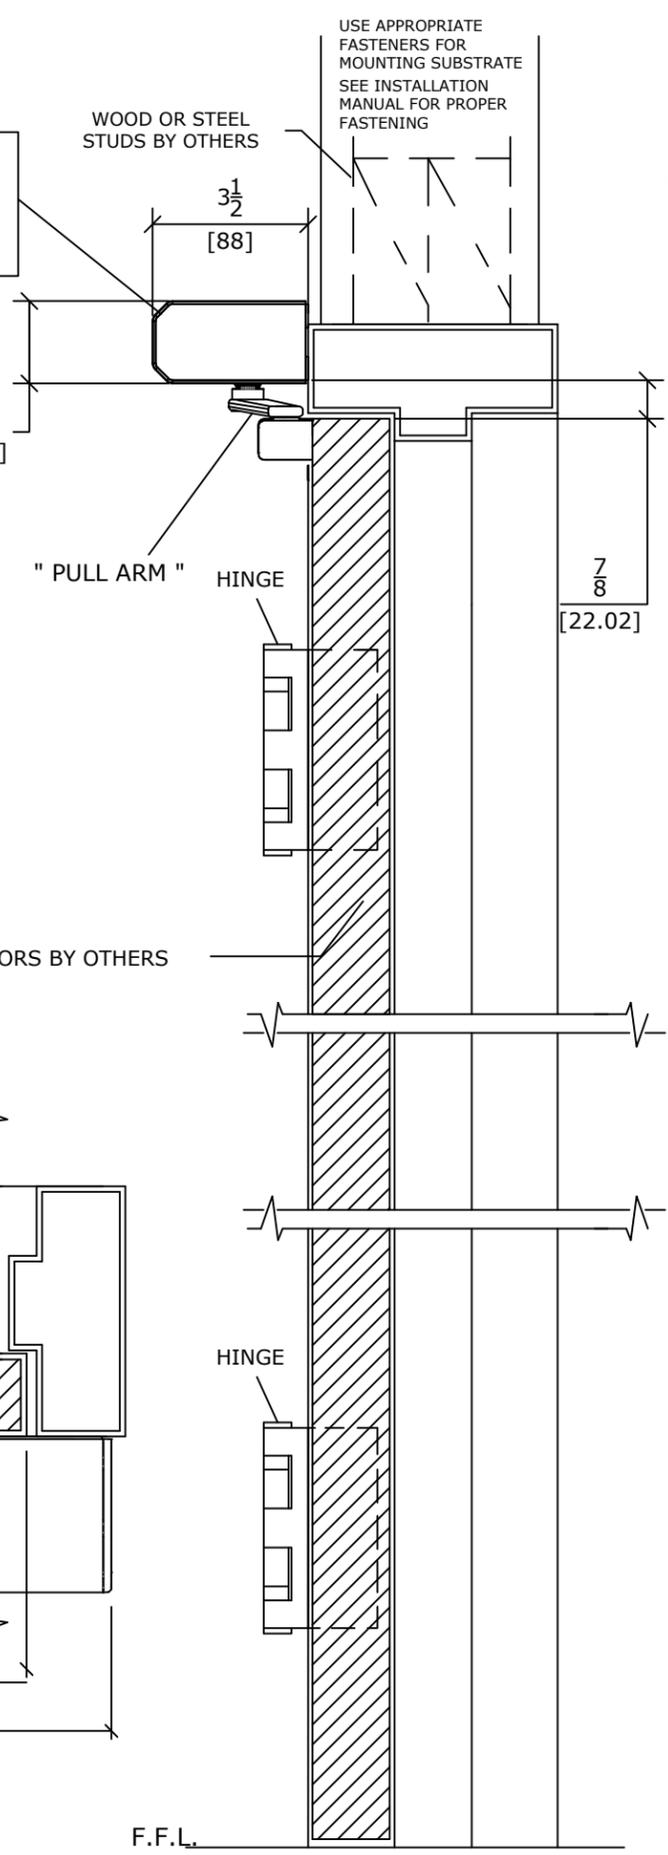

NOTE: DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC. REF. AS FOLLOWS: 1" (25.4). ALL METRIC SIZES ARE IN MILLIMETERS.

* FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT SPECIFICATION OR INSTALLATION INSTRUCTIONS. POWER ADAPTOR TO BE INSTALLED PER NFPA 70/NEC REQUIREMENTS AND/OR AHJ