

**NOTE:** THE STANDARD PACKAGE CONSISTS OF:  
 THE AUTOMATIC OPERATOR, CONTROLLER, POWER SUPPLY, PUSH ARM, PULL ARM (INCLUDED IN BOX), SPINDLE COVERS, HOLD/AUTO/OFF SWITCH, SMART DEVICE OPERATION VIA APP (DEVICE BY OTHERS), DOOR STOP, ELECTRONIC & MECHANICAL LOCK KICK.  
 SMART DEVICE DIAGNOSTICS & STATISTICS VIA APP (DEVICE BY OTHERS)  
 STANDARD FINISH: CLEAR OR DARK BRONZE



- OPTIONS:**
- REMOTE POWER BOX ADAPTOR KIT, CONCEALED IN CEILING OR FLUSH MOUNTED IN WALL. CUT SHEET AA-61
  - SURFACE MOUNTED WIRE MOLD
  - DOOR MOUNTED APPROACH SIDE SAFETY SENSOR
  - WAVE OR PRESS ACTIVATION PLATES (PLATES CAN BE CONCEALED INTO WALL OR SURFACE MOUNTED WITH WATER RESISTANT PLASTIC ENCLOSURE)
  - ELECTRIC STRIKE TO RELEASE DOOR LATCH (IF EQUIPPED)
  - PLUG-IN POWER SUPPLY KIT, CUT SHEET AA-65

**AUTOMATIC :-**  
 ACTIVATE THE DOOR BY HANDICAPPED WAVE/PRESS PLATE AND THE DOOR WILL SLOWLY POWER OPEN, TIME OUT, AND SLOWLY CLOSE.


**PUSH ACTIVATION :- (OPTIONAL)**  
 PUSH OR PULL THE DOOR AND IT WILL SLOWLY POWER OPEN, TIME OUT, AND SLOWLY CLOSE.

**NOTE :** OPERATIONAL ADJUSTMENTS TO BE IN ACCORDANCE WITH ANSI/BHMA A156.19 STANDARD. FOR LOW ENERGY POWER OPERATED DOORS.

**NOTE :** WAVE/PRESS PLATE ACTIVATION TO BE LOCATED WITHIN VIEW OF THE DOOR. REFERENCE ANSI A156.19 FOR FURTHER DETAILS.

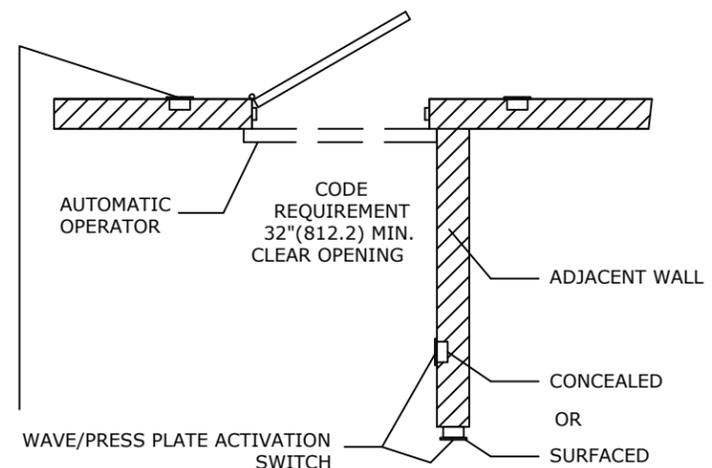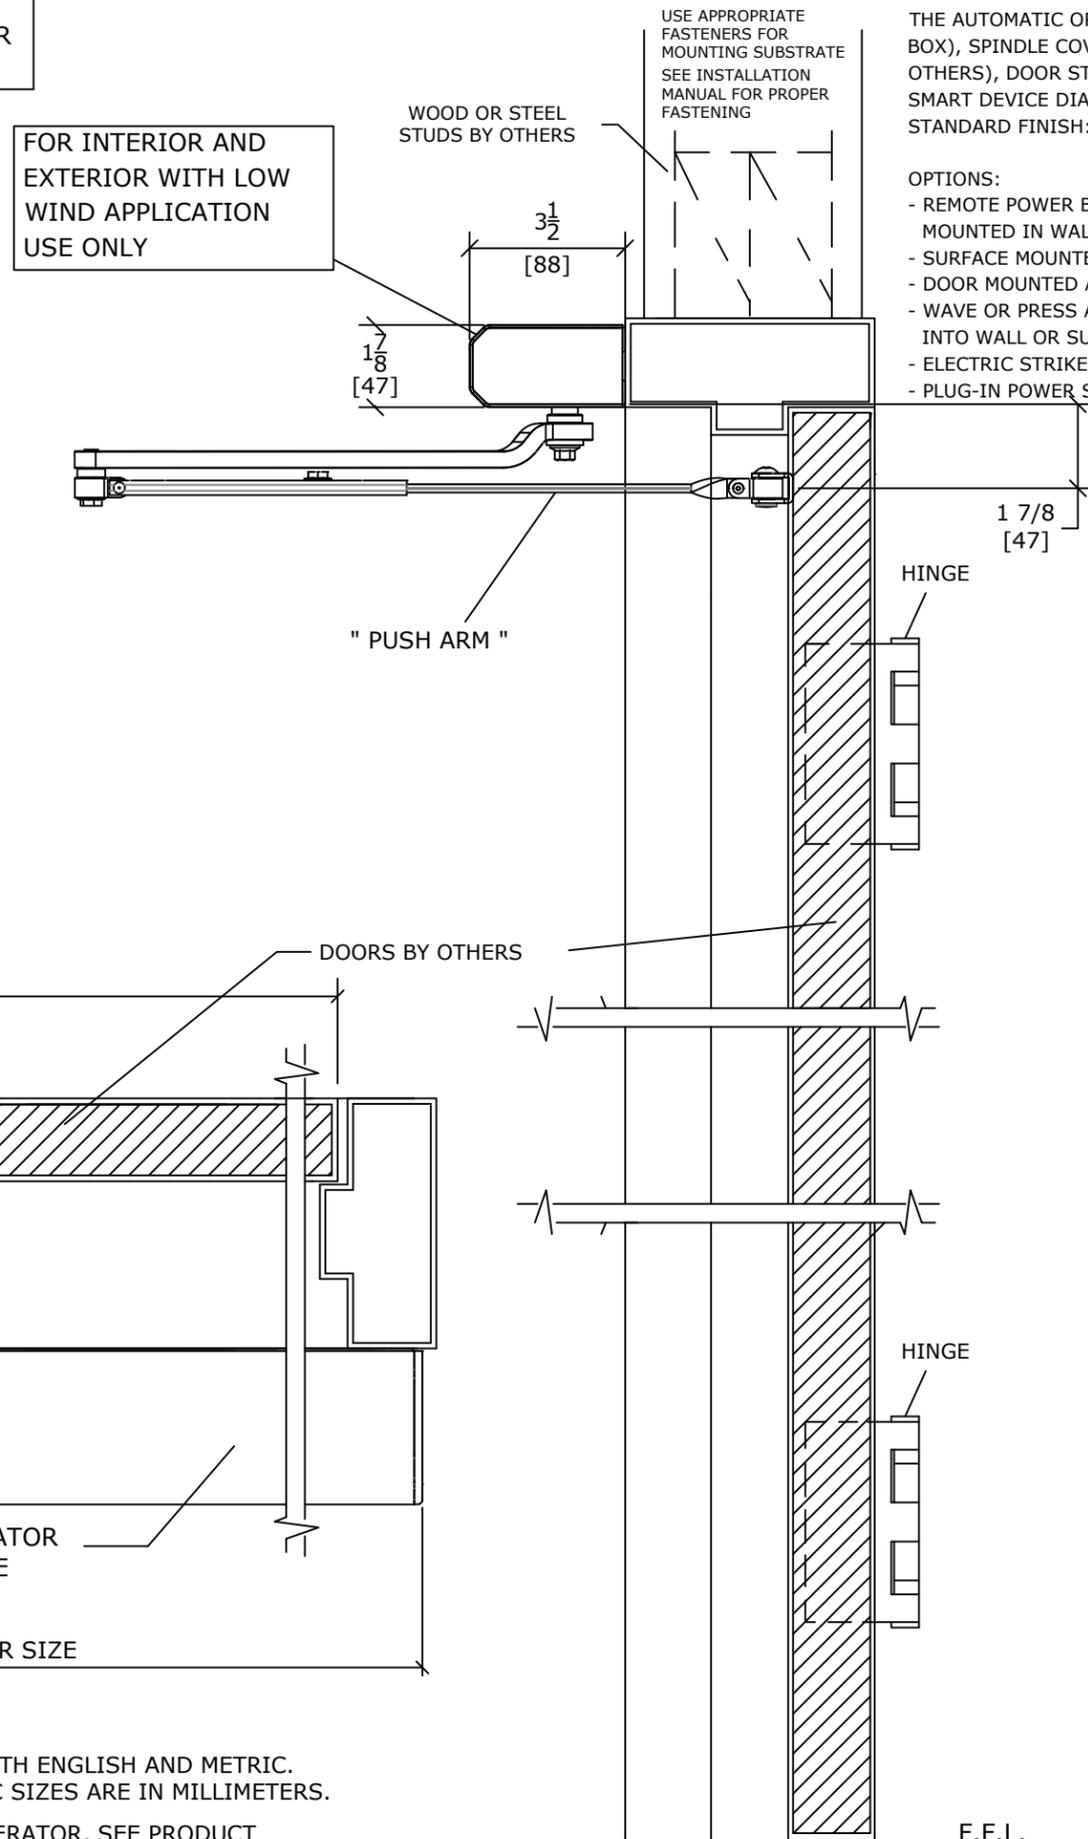

DWG NO. D001570796-001					
DRN BY	DATE	CHK BY	DATE	REV.	DATE
SS	7/23/20			4.0	11/18/24

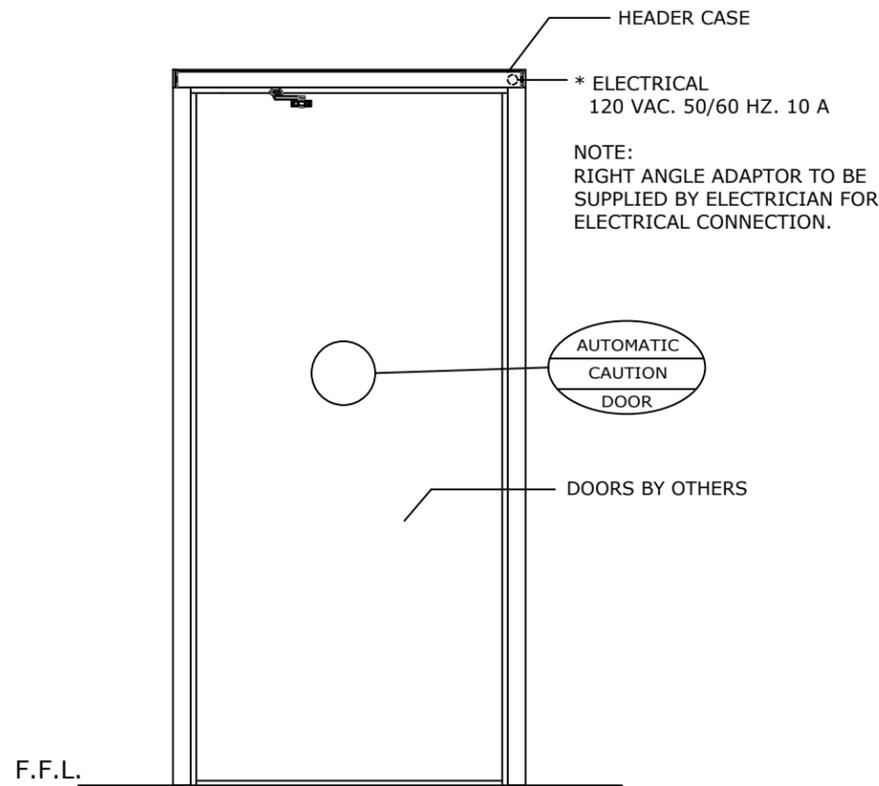

LH PUSH SHOWN (RH OPPOSITE)

36" DOOR SHOWN, TYP

