

## Wireless Weatherproof Entry Alert System

### E-931CS22RFCQ

Sensor Range: Up to 22ft (7m)

Wireless Range: Up to 328ft (100m)

#### Features:


- Monitor a driveway or use as an entrance indicator
- No wiring necessary between sensor and speaker
- Sensor can pair with an unlimited number of speakers
- Speaker can pair with up to five sensors
- Sensor is weatherproof for outdoor use
- Speaker makes chime or alarm sound when beam is interrupted
- Alarm output time is adjustable from 3~30 seconds
- Includes weatherproof wireless reflective sensor (TX), wireless speaker (RX), reflector, two power adapters, two mounting brackets (for the sensor and speaker)
- New optional wall-mount bracket available



#### Specifications:

		Sensor	Speaker
Sensing range		Up to 22ft (7m)	N/A
Wireless range		Up to 328ft (100m)	
Operating frequency		433.92MHz	
Operating voltage		12VDC	
Current draw	Standby	5mA	25mA
	Active	20mA	100mA
Power input		2.5mm DC Jack	
Light source		IR LED	N/A
Operating temperature		32°~122° F (0°~50° C)	
Volume		N/A	0~90 dB
Alarm time range		N/A	3~30 s (adjustable)
Speaker output		N/A	Chime/Off/Alarm (selectable)
IP Rating		IP55	N/A
Dimensions		3 1/4"x2 9/16"x1 1/2" (82x66x38 mm)	3 1/4"x2 15/16"x1 9/16" (83x75x40 mm)

#### Wiring:

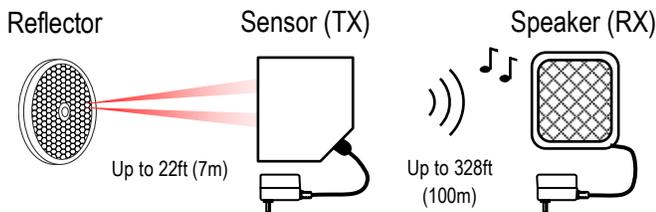


#### Optional Accessories:

**E-931ACC-HR1Q**  
Reflector hood



**E-931ACC-BLS8Q**  
Wall bracket



**E-931ACC-SFQ**  
Additional wireless speaker



**E-931ACC-R2Q**  
Square Reflector



**E-931ACC-CQ**  
Digital counter



**E-931ACC-SPQ**  
Solar charger for sensor unit



**SECO-LARM® U.S.A., Inc.**

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2018 SECO-LARM U.S.A., Inc. All rights reserved.  
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.  
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®**

PL\_E-931CS22RFCQ\_180719.docx