

### Surface-Mount Electric Rim Strikes

#### SD-998C-D3Q

3/4" Housing thickness

#### SD-998C-D3AQ

1/2" Housing thickness

#### SD-998CM-SD3A

1/2" Housing thickness, latch monitoring

The SECO-LARM Surface-Mount Electric Rim Strikes are designed with the strength and durability for use with rim-type exit devices with a Pullman latch bolt (3/4" throw for the SD-998C-D3Q, 1/2" throw for the SD-998C-D3AQ and SD-998CM-SD3A). The strikes feature 12/24 VDC operating voltage, selectable fail-safe/fail-secure operation, horizontal adjustment, and a surface-mount metal housing, eliminating the need for frame cutting during installation.

#### Features

- UL 294 & UL 1034 Listed
- Tamper-resistant
- 12/24 VDC Operating voltage
- Non-polarized connection
- Horizontal adjustment
- Accommodates up to 3/4" Pullman latch
- Reversible non-handed design
- Stainless steel construction
- Surface-mount on metal or wood frames
- Works with standard rim-type exit devices including SECO-LARM SD-962AR-36A, SD-962AR-36G, SD-962BR-36A, and SD-962BR-36G
- For indoor use only
- Latch monitoring (SD-998CM-SD3A only)
- Field-selectable for fail-safe or fail-secure
- Spacers included
  - SD-998C-D3Q – 3x 1/32" (0.9mm)
  - SD-998C-D3AQ – 1x 1/16", 2x 1/8" (1.5mm, 3mm)
  - SD-998CM-SD3A – 1x 1/16", 2x 1/8" (1.5mm, 3mm)



SD-998C-D3Q shown

12/24  
VDC

Fail-Safe /  
Fail-Secure

Horizontal  
Adjustment

UL  
294

1,500-lb  
Static  
Strength

70ft-lb  
Dynamic  
Strength

UL  
1034

#### Specifications

Model	SD-998C-D3Q	SD-998C-D3AQ	SD-998CM-SD3A
Operating voltage	12/24 VDC		
Current draw	540mA@12VDC, 270mA@24VDC		
Maximum latch throw	3/4" (19mm)	1/2" (13mm)	
Latch monitoring	N/A		1A@30VDC
Static strength	1,500-lb (6673N)		
Dynamic strength	70ft-lb (95J)		
Endurance	250,000 cycles (UL Tested), Level IV		
Destructive attack	Level I		
Line security	Level I		
Standby power	Level I		
Operating temperature	14°~120° F (-10°~49° C)		
Operating humidity	0~85%		
Dimensions	9"x1 3/4"x3 1/4" (229x45x19 mm)	9"x1 3/4"x1 1/2" (229x45x13 mm)	

#### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326


Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2026 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

**Dimensions**

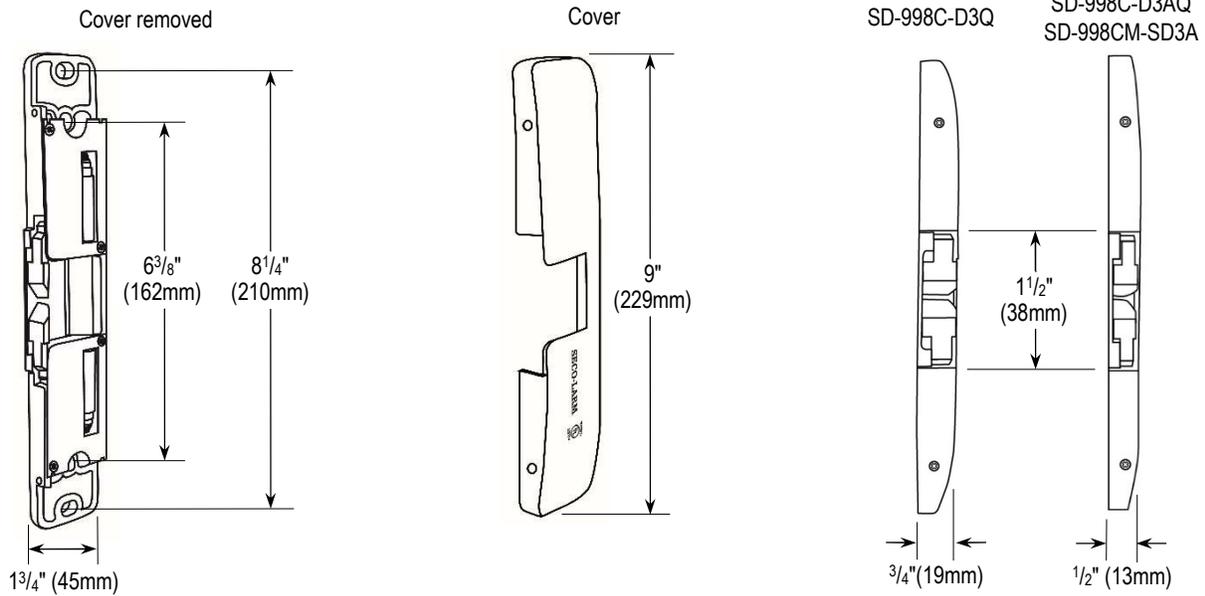

**Accessories**

**Surface-Mount Bracket  
SD-998SMB**



Product



Installation\*



Sample Application\*

\*SD-998C-D3Q Aluminum finished strike shown.